
S30 Solar Lantern

d.light design

Results based on test procedures detailed in IEC 62257-9-5, ed. 2.0

Verify Online:

www.lightingglobal.org/products/dl-s30 *Valid Until:* December 31, 2018

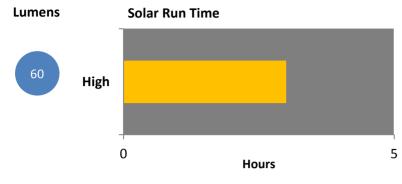





1 Light Point

Warranty Information

A 2-year warranty covering manufacturing defects.

Performance Details	
	Brightness Setting***
Performance Measure	High
Full battery run time* (hours)	3
Run time per day of solar charging* (hours)	3
Total light output (lumens)	60
Total area with illumination > 50 lux** (m ²)	
Total lighting service (lumen-hours / solar-day)	180

^{*} Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

^{***} Additional brightness settings (not tested): Middle, Low

Lighting Details	
Lamp type	LED
Description of light points	Two LEDs in the light point.
Colour characteristics	CRI 83
	CCT "Cool" (5000-7000 K)
Distribution type	Omnidirectional
Lumen maintenance	99% of the original output remains after 2,000
	hours run time
Special Features	
Product Housing	UV Resistant Plastic
Grid Charging	Grid charging via a Nokia mobile charging kit (not included)
Durability	
Overall durability and workmanship	Pass

^{**} Total area with illumination > 50 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

Drop test, switch and connector cycling, strain		
relief test, physical ingress protection test.		
protection from frequent rain		
<u> </u>		
Monocrystalline silicon		
0.33 watts		
Not easily replaceable with common tools		
Lithium iron phosphate		
IFR 14500		
450 mAh		
3.2 V		
Pass		
Marks and Certifications		
ISO 9001:2008; ISO 14001:2004		
Light to the		
d.light design		
S30 Solar Lantern		
S30		
testing@dlight.com		
www.dlight.com		
December 31, 2018		
2016		
2016.12		